

## ACCESORIOS

### Mini-Lube Portable Lubricator

Model 100250 - 1/4" Air Flow 5-15 cfm



Weight..... 2.5 oz.  
Length..... 2-1/2"  
Maximum O.D..... 1-3/16"  
Pipe Size..... 1/4"  
Oil Capacity..... 5 cc

### Midget-Lube Portable Lubricator

Model 300250 - 1/4" Air Flow 8-20 cfm  
Model 300375 - 3/8" Air Flow 10-30 cfm



Weight..... 3.5 oz.  
Length..... 2-1/2"  
Maximum O.D..... 1-1/4"  
Pipe Sizes..... 1/4" & 3/8"  
Oil Capacity..... 9 cc

### Master-Lube Portable Lubricator

Model 400250 - 1/4" Air Flow 8-20 cfm  
Model 400375 - 3/8" Air Flow 10-40 cfm  
Model 400500 - 1/2" Air Flow 25-65 cfm



Weight..... 5 oz.  
Length..... 3-1/4"  
Maximum O.D..... 1-5/8"  
Pipe Sizes..... 1/4", 3/8" & 1/2"  
Oil Capacity..... 22 cc

### Air Tool Inlet Regulators

Ideal for restricting the air flow to tools not equipped with built-in regulators. Model 894 CP style regulator features brass construction and a spring loaded ratchet, which prevents unintentional setting changes.

- Easy to install, easy to use.
- Provides precise regulation of air.

Model 894 1/4" NPT  
Model 5711 1/4" NPT  
Model 038-0.375 3/8" NPT  
Model 038-0.500 1/2" NPT



### 1/4" Regulator

with Pressure Gauge Model 5712-F

Ideal for restricting air flow to tools with 1/4" pipe thread. Features a built-in pressure gauge for perfect control of power. Handy, sturdy design and easy to attach.



### Regulator Pressure Gauge

- Quality air gauge designed for use with any air tool.
- Metal case with glass lens.



Model PG1 1/8" MPT, back mount, 0-160 psi, 1-1/2" dial  
Model PG2 1/4" MPT, back mount, 0-200 psi, 2" dial  
Model PG3 1/4" MPT, bottom mount, 0-160 psi, 2" dial  
Other sizes and pressure ranges available.

### Air Line Pressure Gauge

- For constant reading of line pressure.
- 1/4" male bottom connection.
- Large indicator dial.
- Chrome plated case.



Model No.	Range	Dial Size
GB14100	0-100 psi	2"
GB14160	0-160 psi	
GB14200	0-200 psi	
GB14300	0-300 psi	
GB16160	0-160 psi	2-1/2"
GB16200	0-200 psi	
GB16300	0-300 psi	
GB17600	0-600 psi	3-1/2"

Other sizes and pressure ranges available.

### Safety Excess Flow Check Valve

- OSHA approved.
- Tamper proof construction.
- Allows full, unrestricted airflow.
- Automatically shuts off air flow in case of sudden air line break protecting personnel and property.
- Automatic reset after line repair.



Model No.	Inlet Size	Outlet Size
SV802	1/4" FPT	1/4" FPT
SV803	3/8" FPT	3/8" FPT
SV804	1/2" FPT	1/2" FPT
SV200F-85	2-1/4" FPT	2-1/4" FPT
SV806	3/4" MPT	3/4" FPT
SV808	1" MPT	1" FPT

### Full Flow Brass Ball Valve

For control of air, water and oil in hoses or pipelines up to 400 psi. Features a brass valve body, brass stems, stainless steel ball and die cast aluminum handle with a vinyl sleeve. Equipped with female threaded ends and full port design.



Model No.	Pipe Size
21104	1/4"
21106	3/8"
21108	1/2"
21112	3/4"
21116	1"
21120	1-1/4"

# ACCESORIOS

## Portable Air Line Lubricators

Designed to supply oil to air tools where it is not practical to use stationary lubricators. Can be installed as far away as 25 feet. Oil flows into the line each time the tool is started. Easy and inexpensive way to keep air tools operating at peak efficiency. Features adjustable oil flow, visible oil supply and rugged casting for use in severe conditions.

**In-line filters designed to screw directly into the lubricators available on page 155.**

**TX-02000PR** Pressure Relief Cap

**TXLRK** Repair Kit

Model No.	Oil Capacity	Pipe Size	Rec'd Air Flow @70PSI	Max. PSI	Length	Height	Weight
0-R	1.4 oz.	1/2"	30 cfm	500	4-1/2"	2-1/4"	0.88 lbs.
1-R	3.7 oz.	3/4"	70 cfm	260	6"	2-3/4"	1.50 lbs.
2-R	11.0 oz.	3/4"	70 cfm	300	7"	3-1/2"	2.00 lbs.
2A-R	11.0 oz.	1"	70 cfm	300	7"	3-1/2"	2.00 lbs.
3-R	16.0 oz.	1"	150 cfm	250	10"	3-3/4"	4.25 lbs.



**Model 0-R**  
Lubricator with optional pressure release cap

## In-line Lubricator w/ Integral Filter




**Model TX-1L-F**

Model No.	Oil Capacity	Pipe Size	Rec'd Air Flow @70PSI	Max. PSI	Height
TX-0L-F	1.4 oz.	1/2"	30 cfm	500	2-1/4"
TX-1L-F	3.7 oz.	3/4"	70 cfm	260	2-3/4"

## Safety Lock Cables

Helps prevent injury due to broken hose connections. Spring-powered loops provide a firm grip on the hose. **Bleed air pressure from hose before removing safety lock cable.**

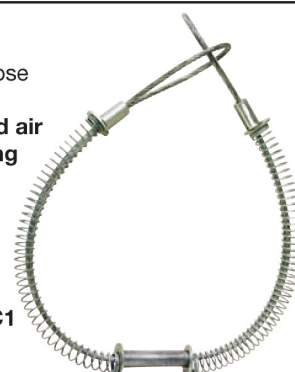


**Model TX-SLC1**

Model No.	Cable Description (Dia. x L)	Fits Hose OD
TX-SLC1	1/8" x 20"	1/2" to 1-1/4"
TX-SLC2	1/4" x 38"	1-1/2" to 3"

## Lubricator Whip Hose Assemblies



**Model MP-3HW**

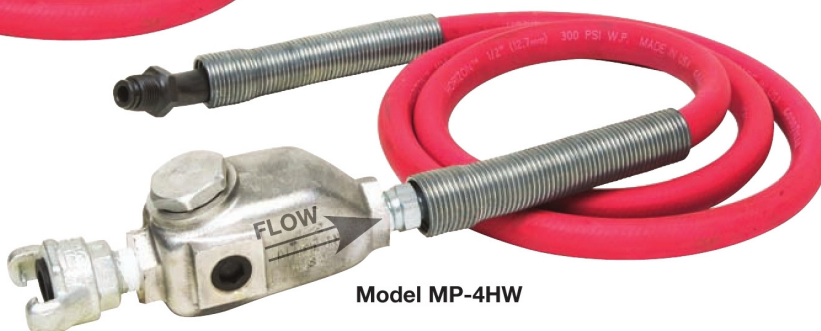

**Model MP-4HW**

Model No.	Assembly Components			Air Flow @ 70 psi
	Fitting to Tool	Hose	Lubricator	
MP-1HW	1/4" MPT	1/2" ID x 6 ft.	0-R	30 cfm
MP-2HW	3/8" MPT			
MP-3HW	1/2" MPT			
MP-4HW	L-1 swivel (7/8"-24 thread)			
MP-4HW-0.500	L-3 swivel (1/2" MPT)			

**EDSOM**

**MADE  
U.S.A.  
IN THE**