

## Heavy-Duty Impacts



**Model MP-1034EITH**



**Model MP-1040EITH**



**Model MP-1550EITH**

Features a twin hammer clutch for more power per pound, a pressure fed clutch lubrication system, two piece motor housing for easy maintenance, a built-in muffler for low noise and direct drive for fast run down.

Model No.	Shank Size	Handle Type	Torque Range	Length	Weight	Air Inlet Thread*	Avg. Air Consumption
MP-1034EITH MP-1034EOTH MP-1034EI5S MP-1034EO5S	1" Sq. Through-Hole 1" Sq. Through-Hole #5 Spline #5 Spline	Inside Trigger Outside Trigger Inside Trigger Outside Trigger	1100-1500 ft.-lbs.	11-1/4"	19 lbs.	1/2"	47 cfm
MP-1040EITH MP-1040EOTH MP-1040EI5S MP-1040EO5S	1" Sq. Through-Hole 1" Sq. Through-Hole #5 Spline #5 Spline	Inside Trigger Outside Trigger Inside Trigger Outside Trigger	1600-2000 ft.-lbs.	12-13/32"	22 lbs.	1/2"	58 cfm
MP-1550EITH MP-1550EOTH MP-1550EI5S MP-1550EO5S	1-1/2" Sq. Through-Hole 1-1/2" Sq. Through-Hole #5 Spline #5 Spline	Inside Trigger Outside Trigger Inside Trigger Outside Trigger	2500-3000 ft.-lbs.	14-1/2"	33 lbs.	1/2"	70 cfm

## Heavy-Duty Impacts



**Model MP-1011EOTH**



**Model MP-1520EITH**

Features a high energy per blow two jaw clutch, rugged steel clutch housing machined from bar stock, bronze alloy end plates for long motor life, a three piece housing for ease of maintenance, high power-to-weight ratio.

Model No.	Shank Size	Handle Type	Torque Range	Length	Weight	Air Inlet Thread*	Avg. Air Consumption
MP-1011EITH MP-1011EOTH MP-1011EI5S MP-1011EO5S	1" Sq. Through-Hole 1" Sq. Through-Hole #5 Spline #5 Spline	Inside Trigger Outside Trigger Inside Trigger Outside Trigger	1800-2800 ft.-lbs.	12-1/2"	22.50 lbs.	1/2"	47 cfm
MP-1520EITH MP-1520EI5S	1-1/2" Sq. Through-Hole #5 Spline	Inside Trigger	2500-3500 ft.-lbs.	14-3/4"	33.75 lbs.	1/2"	70 cfm



## Model 2920

### **Pistol Impact** - 3/4" Square Drive

**Features a through-hole anvil.** Rugged steel alloy hammer case machined from solid bar. Twin hammer mechanism for high power-to-weight ratio. **Model 2920-1 with a 1" through-hole anvil available.**

Square Drive .....	3/4"	Length .....	12-1/2"
Free Speed .....	5500 rpm	Weight .....	12 lbs.
Torque Range .....	800-1100 ft.-lbs.	Air Inlet Thread .....	3/8"
Rec'd Hose Size .....	1/2"	Avg. Air Consumption .....	38 cfm



## Model MP-7560

### **Pistol Impact** - 3/4" Square Drive

**Features a through-hole anvil.** Powerful two-jaw clutch and steel clutch housing design offers power and dependability. Adjustable power regulator for forward-reverse control built-in.


Square Drive .....	3/4"	Length .....	12-1/2"
Free Speed .....	3000 rpm	Weight .....	12 lbs.
Torque Range .....	560-1100 ft.-lbs.	Air Inlet Thread .....	3/8"
Rec'd Hose Size .....	1/2"	Avg. Air Consumption .....	38 cfm

## **Extra Heavy-Duty Impacts**



**Model MP-1578**

**Features a through-hole anvil.** Designed to produce an exceptionally high torque output. Effective for shipyards, bridge construction, building construction and heavy manufacturing plants. Time tested design for maximum durability.

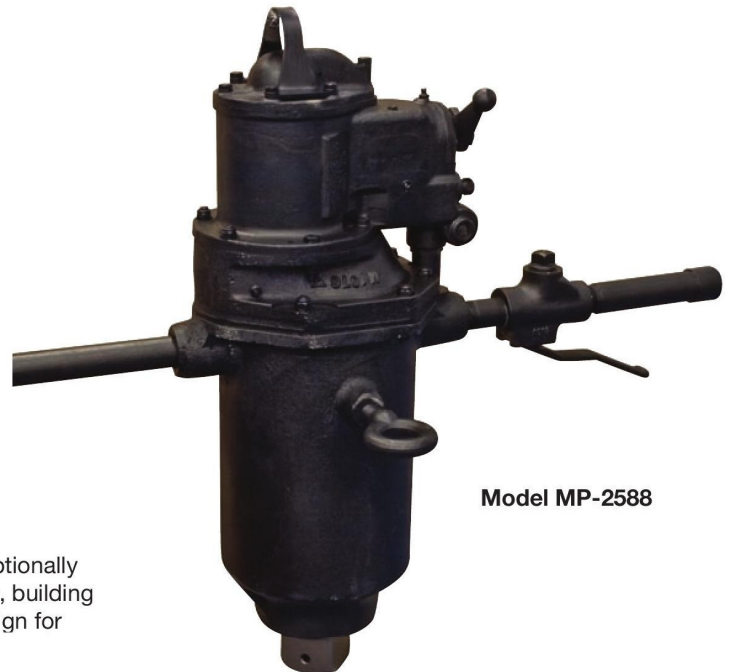

**Model MP-2588**

Model No.	Shank Size	Torque Range	Length	Weight	Rec'd Hose Size	Air Inlet Thread	Avg. Air Consumption
MP-1578	1-1/2" Sq. Through-Hole	5500-10000 ft.-lbs.	23"	86 lbs.	3/4"	3/4"	138 cfm
MP-2588	2-1/2" Sq. Through-Hole	25000-50000 ft.-lbs.	25-3/8"	215 lbs.	1"	1"	155 cfm